


Hy-Lok 105 Series

High Pressure Ball Valves for General Service

Catalog No. H-105BV
Dec. 2012

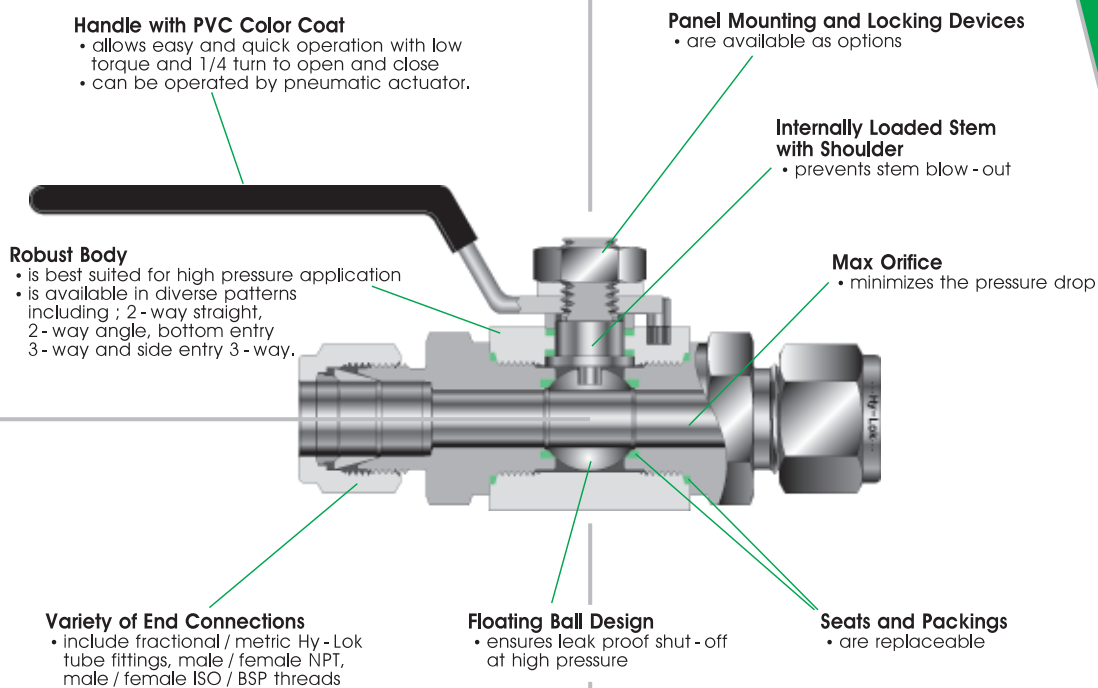

Features

- **Pressure rating** up to 10,000 psig (690bar) @ 70°F(21°C)
- **Temperature rating** from -22°F to 265°F(-30°C to 130°C) with PVDF seat or from -65°F to 500°F (-54°C to 260°C) with PEEK seat
- **Small and compact design**
- **Materials available** in 316 stainless steel and alloy 400
- **100% factory tested.**



HY-LOK CORPORATION

© 1998, 2000, 2002, 2003, 2012 HY-LOK CORPORATION All rights reserved

2-Way


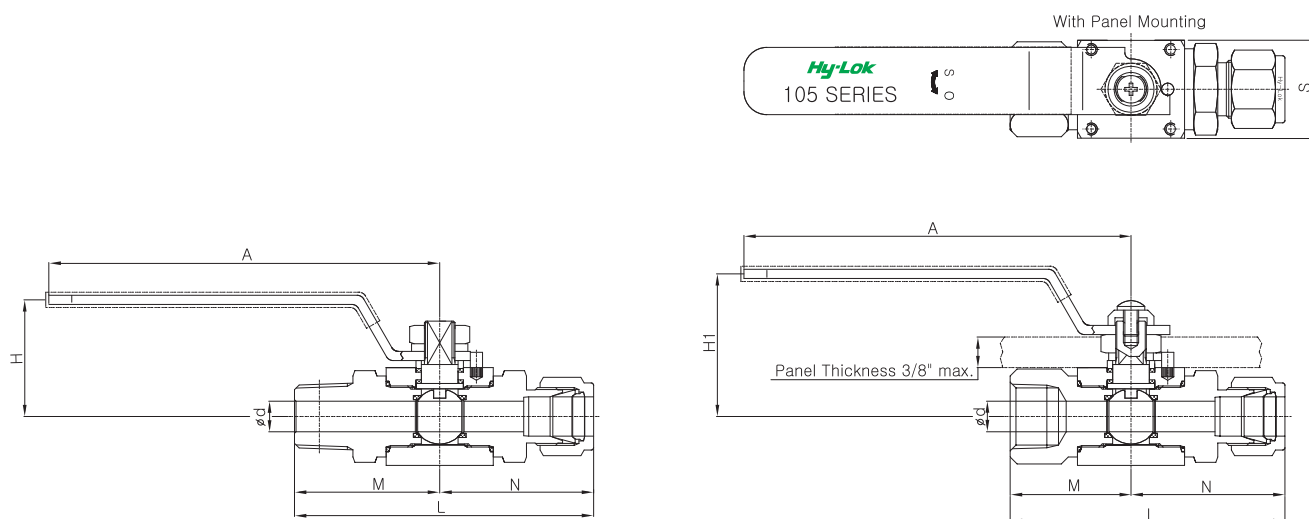


Table of Dimensions

Basic Part No.		Orifice	Cv	End Connections	d Min.	Dimensions						
				Inlet & Outlet		M	N	L	H	A	H1	S
H1B	- H - 4 T	10.0	1.2	1/4" Hy-Lok	4.8	45.8	45.8	91.6	38.0	126.5	46.7	32.0
	- H - 6 T		3.7	3/8" Hy-Lok	7.11	47.3	47.3	94.6				
	- H - 8 T		7.5	1/2" Hy-Lok	10.0	49.8	49.8	99.6				
	- F - 4 N			1/4" Female NPT		32.0	32.0	64.0				
	- F - 6 N			3/8" Female NPT		35.5	35.5	71.0				
	- F - 8 N			1/2" Female NPT		39.5	39.5	79.0				
	- M - 4 N		3.7	1/4" Male NPT	7.11	42.7	42.7	85.4				
	- M - 6 N		7.2	3/8" Male NPT	9.65	42.7	42.7	85.4				
	- M - 8 N		7.5	1/2" Male NPT	10.0	47.6	47.6	95.2				
H2B	- F - 8N	12.7	10.0	1/2" Female NPT	12.7	45.0	45.0	90.0	50.8	162.0	60.6	40.0
	- F - 12N			3/4" Female NPT		45.0	45.0	90.0				
	- M - 12N			3/4" Male NPT		52.6	52.6	105.2				
	- H - 10T			5/8" Hy-Lok		55.3	55.3	110.6				
	- H - 12T			3/4" Hy-Lok		55.3	55.3	110.6				
H3B	- F - 12N	19.0	30.0	3/4" Female NPT	20.0	45.0	45.0	90.0	55.6	162.0	65.6	50.0
	- F - 16N			1" Female NPT		49.1	49.1	98.2				
	- H - 12T		19.0	3/4" Hy-Lok	15.74	58.3	58.3	116.6				
	- H - 16T		30.0	1" Hy-Lok	20.0	64.9	64.9	129.8				
	- M - 12N		19.0	3/4" Male NPT	15.74	57.6	57.6	115.2				
	- M - 16N		30.0	1" Male NPT	20.0	62.4	62.4	124.8				

All dimensions in millimeters. Dimensions shown with Hy-Lok nuts in finger-tight position, where applicable.

3 - Way

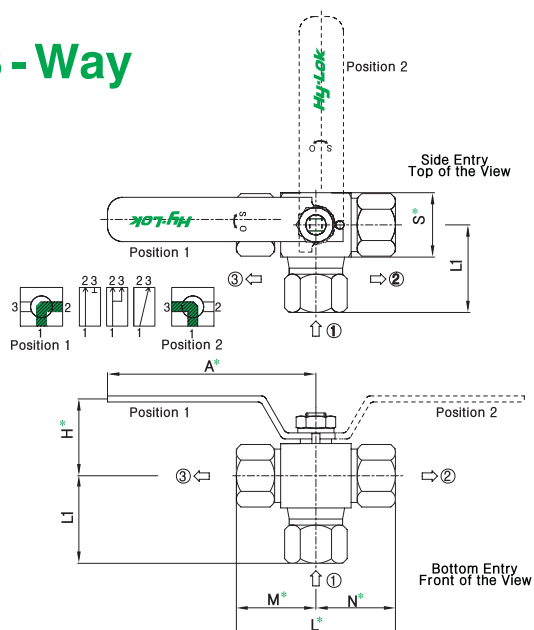

"*"marked dimensions are the same as of 2 - way valve.

Table of Dimensions

Basic Part No.		Orifice	End Connections Inlet & Outlet	d _t Min.	L1
H1B	3*H - 4T	10.0	1/4" Hy-Lok	4.8	53.3
	3*H - 6T		3/8" Hy-Lok	7.11	54.8
	3*H - 8T		1/2" Hy-Lok	10.0	54.0
	3*F - 4N		1/4" Female NPT		36.5
	3*F - 6N		3/8" Female NPT		40.0
	3*F - 8N		1/2" Female NPT		44.0
H2B	3*H - 10T	12.7	5/8" Hy-Lok	12.7	65.3
	3*H - 12T		3/4" Hy-Lok		65.3
	3*F - 8N		1/2" Female NPT		49.5
	3*F - 12N		3/4" Female NPT		55.0
H3B	3*H - 12T	19.0	3/4" Hy-Lok	15.74	69.8
	3*H - 16T		1" Hy-Lok	20.0	69.8
	3*F - 12N		3/4" Female NPT	20.0	56.5
	3*F - 16N		1" Female NPT		60.6

All dimensions in millimeters. Dimensions shown with Hy-Lok nuts in finger tight position, where applicable.

"+" See dimension table on page2

"*" See ordering information on page4

Technical Data

Materials of Construction

Description	Grade/ASTM Specification	
	Valve Body Material	
	SS316	Alloy 400
Handle	Stainless Steel with PVC Coating	
Lock Nut	Stainless Steel with Washer	
Pin	Stainless Steel	
Stem	SS316/A276	Alloy 400/B164
Stem Packing*	PTFE	
Ball*	SS316/A276	Alloy 400/B164
Seats*	PVDF (standard)	
End Connector	SS316/A276	Alloy 400/B164
End Seals*	PTFE/Viton	
Body	SS316/A479	Alloy 400/B164

Note : "*" marked are wetted parts.
Lubricant is silicone based.

Handle

- Handle is made of stainless steel with PVC coat in yellow.
- Other colors are available upon request.

Sour Gas Service

- is provided to meet NACE Standard MR -01 - 75.

Testing

- Each valve is tested with nitrogen @ 1000psig(69bar) to max leak rate of 0.1SCCM.
- Hydrostatic shell test is performed at 1.5 times the working pressure.
- Optional tests are available upon request.

Pressure and Temperature Rating

■ H1B Types

Materials			Pressure Rating @ -65°F ~ 70°F (-54°C ~ 21°C)	Temperature Rating
Seat	Stem Packing	End Seal		
PVDF (standard)	PTFE		6,000 psig (410 bar)	-22°F~265°F (-30°C~130°C)
PCTFE				-22°F~355°F (-30°C~180°C)
PEEK			10,000 psig (690 bar)	-65°F~500°F (-54°C~260°C)

■ H2B, H3B Types

Materials			Pressure Rating @ -65°F ~ 70°F (-54°C ~ 21°C)	Temperature Rating
Seat	Stem Packing	End Seal		
PVDF (standard)	PTFE	Viton	5,000 psig (340 bar)	-10°F~375°F (-23°C~191°C)
PCTFE				
PEEK			6,000 psig (410 bar)	

Note

1. The above pressure rating is for 2 - way straight pattern valves. 80% of the above rating shall be applicable to 2 - way angle pattern valves and 3 - way valves.
2. The rated pressure shown above is the maximum allowable pressure to the seat. If the system requires higher pressure to test, the valve must be in open position before and during test so as not to damage the seat.
3. When valves with Hy - Lok Fitting end connections are connected to tubing, the working pressure of tubing must be considered in the calculation of total system working pressure.


High Pressure Ball Valves

105 Series

Panel Mounting

Valve Type	Orifice	d	D	L x L
H1B	10.0	5.0	30.0	26 x 26
H2B	12.7	5.0	38.0	34 x 34
H3B	19.0	5.0	38.0	44 x 44

All dimensions in millimeters.



Screw Holes in valves are M4 x 6mm Depth

Torque for Turning Handle (N · m)

Valve Type	Orifice	Working Pressure - psig										
		0	1,000	2,000	3,000	4,000	5,000	6,000	7,000	8,000	9,000	10,000
H1B	10.0	1.6	1.4	1.4	1.6	2.1	2.3	2.7	2.9	3.3	3.7	4.0
H2B	12.7	3.3	2.9	3.8	4.3	5.0	5.2	5.6	-	-	-	-
H3B	19.0	3.2	3.1	4.2	6.5	8.0	8.6	9.6	-	-	-	-

Ordering Information

H1B

Valve Type Designator

- H1B : 10.0mm Orifice
- H2B : 12.7mm Orifice
- H3B : 19.0mm Orifice

3

Pattern Designator*

- Nil : 2-way Straight
- A : 2-way Angle
- 3S : 3-way Side Entry
- 3B : 3-way Bottom Entry

MH

End Connection Designator

- H : All Ends Hy-Lok Tube Fitting.
- F : All Ends Female Thread.
- M : All Ends Male Thread.

8N8T

Size Designator

• NPT (ISO/BSP)

Thread(in)	1/4	3/8	1/2	3/4	1
Designator	4N(R)	6N(R)	8N(R)	12N(R)	16N(R)

PC

Seat Material Designator*

- Nil : PVDF (Standard)
- PC : PCTFE
- PK : PEEK

M

Panel Mounting Option*

- Nil : Without
- M : With

O

Handle Option*

- Nil : Lever(Standard)
- O : Oval Aluminum (Applicable only for H1B)

L

Locking Device Option*

- Nil : Without
- L : with

SOG

Sour Gas Designator*

- Nil : Without (Standard)
- SOG : NACE MR-01-75

S316

Material Designator

- S316 : 316 Stainless Steel
- MONE : Alloy 400(Monel)

Note*: No designator is required for standard items, e.g. H1B - F - 6N - S316.

CAUTION

105 Series Ball Valve shall not be used for CNG System.

QUALITY SYSTEM CERTIFICATES



ISO 9001
CERTIFICATE NO.GQC 212

ASME SECT III (MO)
CERTIFICATE NO. QSC 584

TYPE APPROVALS (for Hy-Lok Tube Fittings)



American Bureau Shipping
CERTIFICATE NO.00-BK50288-X



Lloyd's Register
CERTIFICATE NO.01/10075



GERMANISCHER LLOYD
CERTIFICATE NO.57798-91 HH



DET NORSKE VERITAS
CERTIFICATE NO.P-9100

SAFETY in VALVE SELECTION

Proper installation, materials compatibility, operation and maintenance of these valves are the responsibility of the user. The total system design must be taken into consideration to ensure optimal performance and safety.



Distributed by :

www.hy-lok.com