



Image may differ from product. See technical specification for details.

# 16008

## Deep groove ball bearing

Single row deep groove ball bearings are particularly versatile, have low friction and are optimized for low noise and low vibration, which enables high rotational speeds. They accommodate radial and axial loads in both directions, are easy to mount, and require less maintenance than many other bearing types.

- Simple, versatile and robust design
- Low friction
- High-speed capability
- Accommodate radial and axial loads in both directions
- Require little maintenance

# Overview

## Dimensions

Bore diameter	40 mm
Outside diameter	68 mm
Width	9 mm

## Performance

Basic dynamic load rating	13.8 kN
Basic static load rating	10.2 kN
Reference speed	22 000 r/min
Limiting speed	14 000 r/min
SKF performance class	SKF Explorer


## Properties

Filling slots	Without
Number of rows	1
Locating feature, bearing outer ring	Without
Bore type	Cylindrical
Cage	Sheet metal
Matched arrangement	No
Radial internal clearance	CN
Material, bearing	Bearing steel
Coating	Without
Sealing	Without
Lubricant	None
Relubrication feature	Without
Indicative carbon footprint for new product	0.45 kg CO <sub>2</sub> e

## Logistics


Product net weight	0.125 kg
eClass code	23-05-08-01
UNSPSC code	31171504

## Technical specification

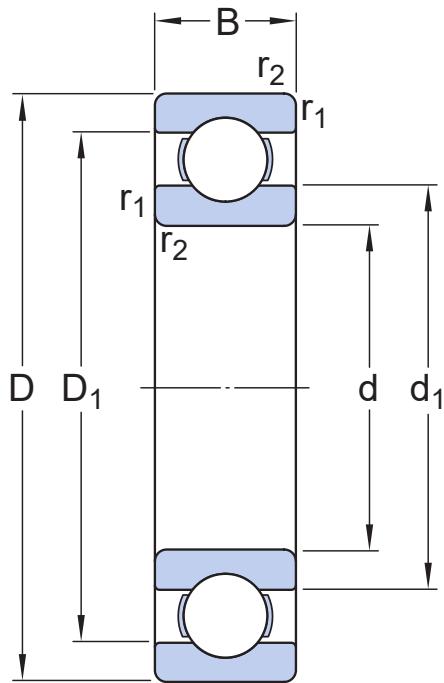

## Dimensions

d	40 mm	Bore diameter
$t_{\Delta d_{mp}}$	-0.01 – 0 mm	Deviation limits of mid-range bore diameter
D	68 mm	Outside diameter
$t_{\Delta D_{mp}}$	-0.011 – 0 mm	Deviation limits of mid-range outside diameter
B	9 mm	Width
$t_{\Delta B_{S}}$	-0.06 – 0 mm	Deviation limits of ring width
$d_1$	$\approx 49.4$ mm	Shoulder diameter
$D_1$	$\approx 58.6$ mm	Shoulder diameter
$r_{1,2}$	min. 0.3 mm	Chamfer dimension
P6 and tighter width tolerance		ISO tolerance class for dimensions

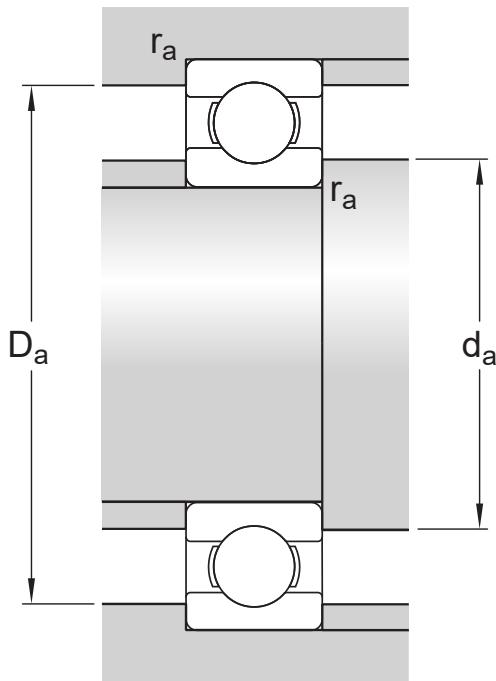

## Abutment dimensions

$d_a$	min. 42 mm	Diameter of shaft abutment
$D_a$	max. 66 mm	Diameter of housing abutment
$r_a$	max. 0.3 mm	Radius of shaft or housing fillet

## Calculation data

SKF performance class	SKF Explorer	
Basic dynamic load rating	C	13.8 kN
Basic static load rating	$C_0$	10.2 kN
Fatigue load limit	$P_u$	0.44 kN
Reference speed		22 000 r/min
Limiting speed		14 000 r/min
Minimum load factor	$k_r$	0.02
Calculation factor	$f_0$	16

## Tolerances of run-out

Range of section height at inner ring of assembled bearing	$t_{Kia}$	10 $\mu\text{m}$
Range of section height at outer ring of assembled bearing	$t_{Kea}$	13 $\mu\text{m}$

## Tolerances and clearances

### GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (metric), P6, P5, Normal (inch)
- Radial internal clearance: Classes C2 to C5

## BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fits



## Terms of use