

S - 1/2" metric 12-point sockets




Standards:

NF ISO 2725-1, NF ISO 1711-1,
ISO 2725-1, ISO 1711-1, DIN
3124, ASME B107.5

Description:

- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.
- Supplied on metal rack. Ref S.40E (8 --> 16 mm) and Ref S.41E (17 --> 24 mm).

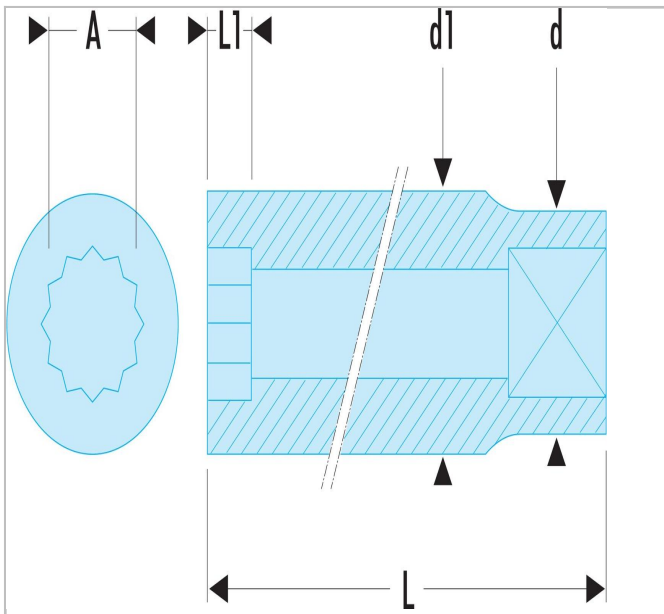

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L [mm]	Length L1 [mm]	12-Point [mm]	Weight [g]
S.10	10	22.8				12.0	50.0
S.11	11.0	22.8	16.5	36.0	9.0	12.0	50.0
S.12	12.0	22.8	17.8	36.0	9.5	12.0	50.0
S.13	13.0	22.8	18.9	36.0	10.4	12.0	50.0
S.14	14.0	22.8	20.2	36.0	10.5	12.0	55.0
S.15	15.0	22.8	21.4	36.0	12.0	12.0	55.0
S.16	16.0	21.6	22.6	36.0	12.0	12.0	55.0
S.17	17.0	23.1	24.1	36.0	13.0	12.0	65.0
S.18	18.0	23.4	25.4	36.0	13.0	12.0	70.0
S.19	19.0	24.6	26.6	36.0	14.0	12.0	75.0
S.20	20.0	25.4	27.4	36.0	14.0	12.0	80.0
S.21	21.0	25.1	29.1	38.0	16.0	12.0	85.0
S.22	22.0	26.4	30.4	38.0	16.5	12.0	95.0
S.23	23.0	27.6	31.6	38.0	16.5	12.0	105.0
S.24	24.0	28.7	32.7	38.0	16.5	12.0	115.0
S.25	25.0	27.7	34.1	38.0	16.5	12.0	125.0
S.26	26.0	29.0	35.4	38.0	16.5	12.0	135.0
S.27	27.0	29.2	36.6	44.0	19.0	12.0	160.0
S.28	28.0	30.5	37.9	44.0	20.0	12.0	175.0
S.29	29.0	31.3	38.7	44.0	20.0	12.0	190.0
S.30	30.0	33.0	40.4	44.0	20.0	12.0	200.0
S.31	31.0	34.2	41.6	44.0	20.0	12.0	205.0
S.32	32.0	35.1	42.5	44.0	20.0	12.0	210.0
S.34	34.0	37.5	44.9	44.0	20.0	12.0	240.0
S.8	8.0	22.8	13.1	36.0	6.5	12.0	45.0
S.9	9.0	22.8	13.8	36.0	6.5	12.0	50.0