

40.LA- Metric long-reach combination wrenches




Standards:

NF ISO 1711-1, NF ISO 3318, NF ISO 7738, ISO 1711-1, ISO 3318, ISO 7738, DIN ISO 691, DIN ISO 1711-1, DIN 3113, ASME B107.100

Description:

- Long combination wrenches: the extra-long handle passes high torque with minimum effort.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut.
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 19 to 65 mm.
- Presentation: satin chrome finish.

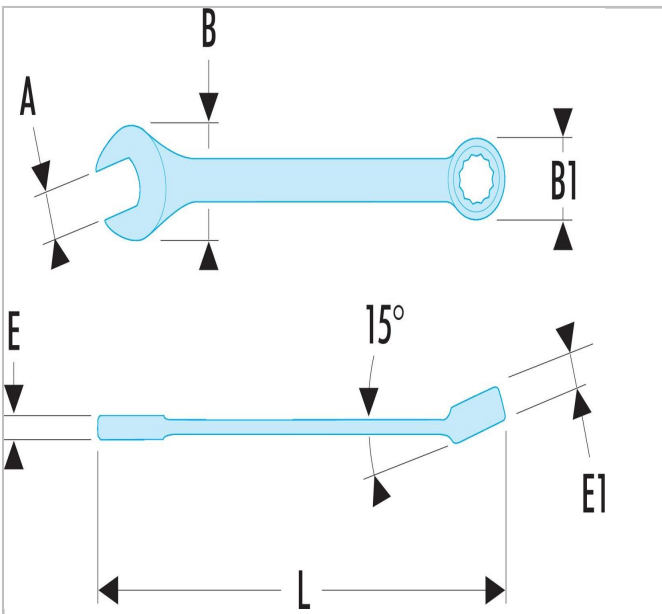

	A [mm]	Length L [mm]	Thickness E [mm]	Thickness E1 [mm]	Head Width B [mm]	Head Width B1 [mm]	Weight [Kg]
40.19LA	19	329.0	8.7	12.0	45.0	29.6	0.24
40.21LA	21	355.0	9.5	13.0	49.0	32.3	0.305
40.22LA	22	368.0	9.9	14.0	51.0	33.8	0.36
40.23LA	23	381.0	10.3	14.5	53.0	35.4	0.37
40.24LA	24	394.0	10.7	15.0	55.0	36.9	0.455
40.26LA	26	420.0	11.5	15.5	59.0	39.4	0.52
40.27LA	27	433.0	11.9	16.0	61.0	40.6	0.59
40.28LA	28	446.0	12.3	16.5	62.4	42.2	0.6
40.29LA	29	446.0	12.3	16.5	62.4	42.2	0.6
40.30LA	30	472.0	13.1	17.0	65.0	45.2	0.8
40.32LA	32	498.0	13.2	18.0	69.5	47.8	0.85
40.33LA	33	498.0	9.5	13.0	49.0	32.3	0.85
40.34LA	34	524.0	9.9	14.0	51.0	33.8	1.04
40.35LA	35	524.0	10.3	14.5	53.0	35.4	1.04
40.36LA	36	550.0	10.7	15.0	55.0	36.9	1.2
40.38LA	38	576.0	11.5	15.5	59.0	39.4	1.435
40.41LA	41	615.0	11.9	16.0	61.0	40.6	1.72
40.42LA	42	615.0	12.3	16.5	62.4	42.2	
40.46LA	46	680.0	12.3	16.5	62.4	42.2	2.435
40.50LA	50	732.0	13.1	17.0	65.0	45.2	3.5
40.55LA	55	760.0	21.5	31.0	42.0	84.5	3.9
40.60LA	60	800.0	23.0	32.0	44.0	90.0	4.9
40.65LA	65	840.0	24.5	32.0	49.7	98.0	6.0