

1/2" drive metal-grip hinged handle




Standards:

NF ISO 3315, ISO 3315, DIN 3122, ASME B107.10

Description:

- 180° hinged and secured head to maintain the position even with a socket engaged.
- Metal handle with knurled handle.

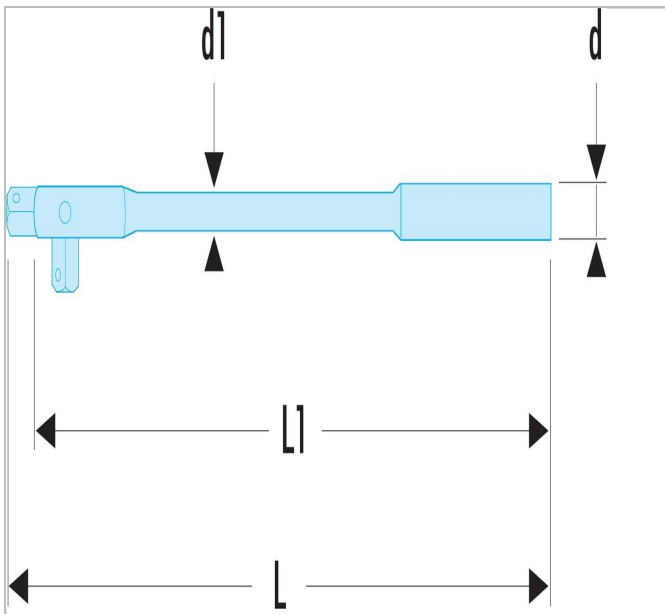

|  | Diameter [mm] | Diameter D1 [mm] | Length L [mm] | Weight [g] | Length L1 [mm] |
|--|---------------|---------------------|---------------------|---------------|----------------------|
| S.145 | 20.0 | 15.0 | 410.0 | 740.0 | 392.0 |