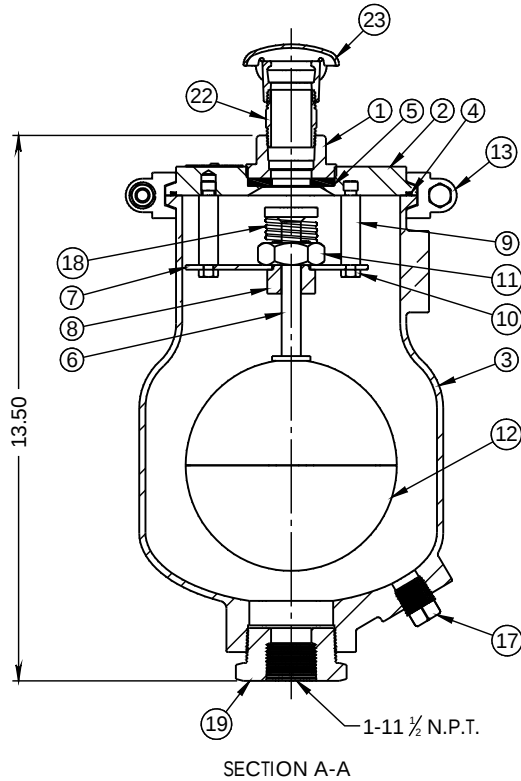
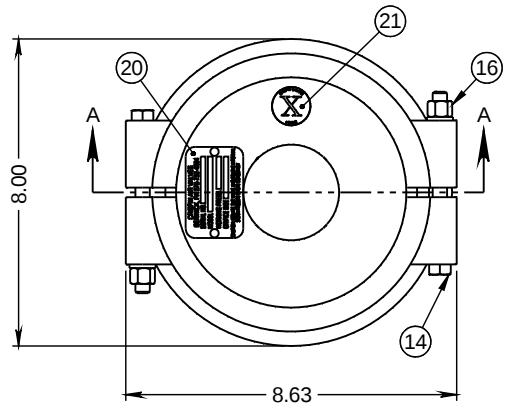


PART LIST				
ITEM NO.	DWG. NO.	DESCRIPTION	MATERIAL	QTY.
1	2-1X	TOP	SUPER DUPLEX S/S	1
2	51-2X	FLANGE	SUPER DUPLEX S/S	1
3	27-3X	BODY	ASTM A995 Gr. A	1
4	AS568A-163	FLANGE O-RING	BUNA-N RUBBER	1
5	2-5	SEAT	BUNA-N RUBBER	1
6	51-6	AIR/VAC VALVE	SUPER DUPLEX S/S	1
7	36-A2-7	ROD GUIDE STAND	SUPER DUPLEX S/S	1
8	36-A2S-8	FLOAT ROD GUIDE	NYLATRON	1
9	51-13	STAND ROD	SUPER DUPLEX S/S	3
10	SHCS.25X.375	GUIDE STAND BOLT	SUPER DUPLEX S/S	3
11	36-A2-11	ROD GUIDE NUT	SUPER DUPLEX S/S	1
12	51-9A	FLOAT	SUPER DUPLEX S/S	1
13	50-16	CLAMP HALF	ASTM A995 Gr. A	2
14	HHCS.38X3.25	CLAMP BOLT	SUPER DUPLEX S/S	2
16	2-12	CLAMP NUT	SUPER DUPLEX S/S	2
17	PLG-.5	PLUG	SUPER DUPLEX S/S	1
18		SPRING	INCONEL	1
19	REBUSH 2 X 1	REDUCING BUSHING	SUPER DUPLEX S/S	1
20	BLUE TAG	TAG	316 STAINLESS STEEL	1
21	X-DOT-R	BLUE DOT	ALUMINUM	1
22	NPL 1XC	NIPPLE	316 STAINLESS STEEL	1
23	MVC-1	VENT CAP	GALVANIZED STEEL	1

NOTES:

- STANDARD WORKING PRESSURE: 2-40 PSIG.
- 200 PSIG MAXIMUM WORKING PRESSURE.

REV	DESCRIPTION		DATE	APPR	
REVISIONS					
	NAME	DATE	CRISPIN VALVE 1" X SERIES VACUUM RELIEF		
DRAWN	GDJ	31AUG05			
CHECKED	BJL	03JAN08			
ENG APPR.					
MFG APPR.					
Q.A.			SCALE: 0.31 WEIGHT: 30.34 LBS SHEET 1 OF 1		
COMMENTS:					
			SIZE	DWG. NO.	REV
			B	AX10-VB-PT	0

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRISPIN VALVE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRISPIN VALVE IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
AS LISTED
FINISH
DO NOT SCALE DRAWING