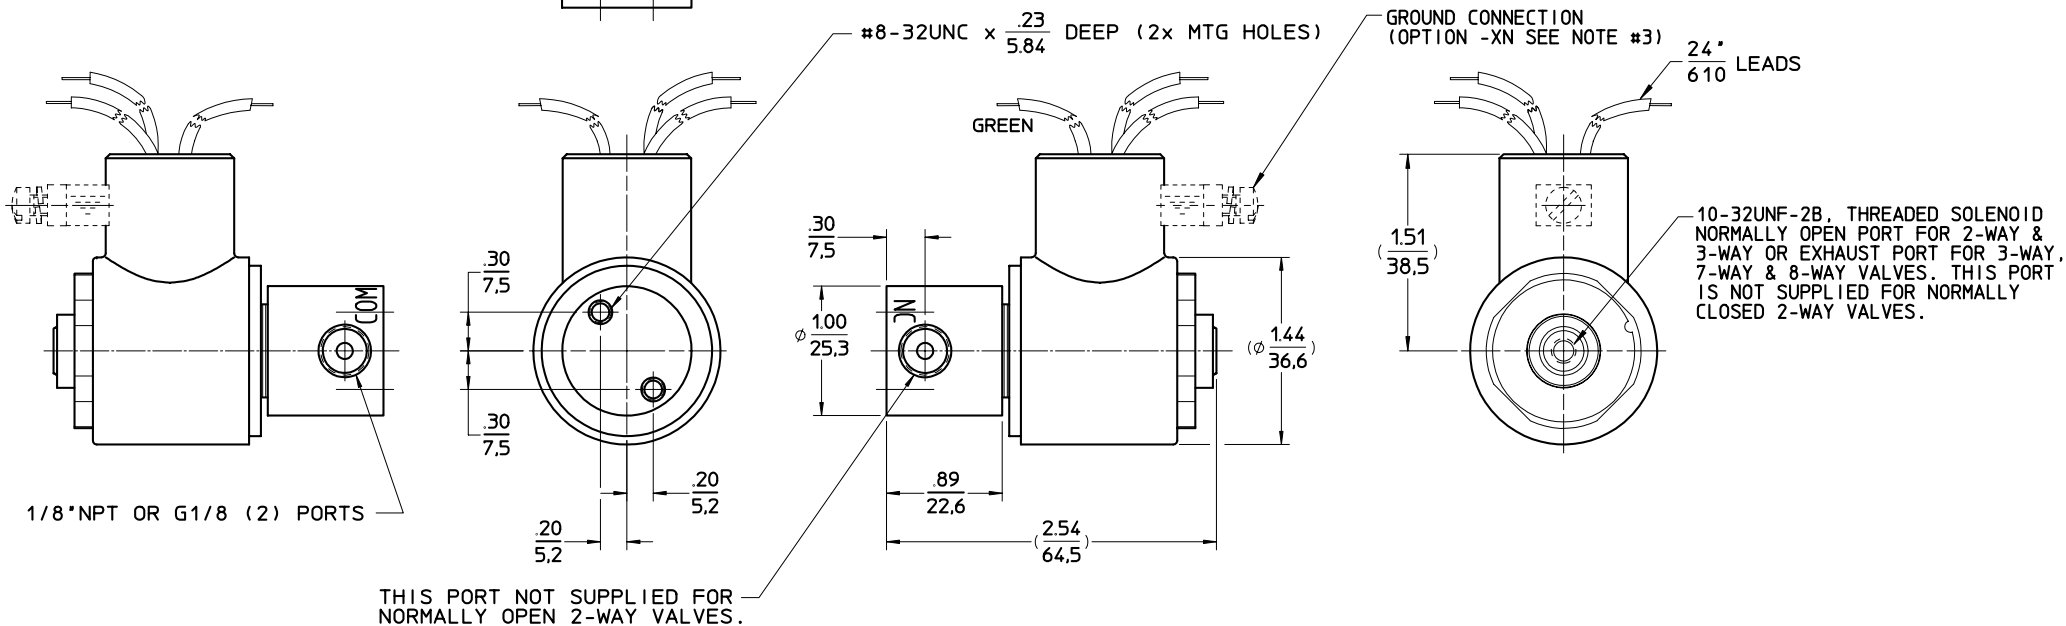


SEE NOTE # 4

1/2"NPT. CONDUIT CONNECTION  
OR M20 X 1.5 WHEN EARTH GROUND  
OPTION IS SPECIFIED.DUST EXCLUDER/SILENCER  
ASSEMBLY (OPTIONAL)  
SUFFIX -L14ADAPTER (OPTIONAL)  
SUFFIX -H2

## NOTES:

- 1) S.A.E. PORT MARKINGS SHOWN. I.S.O. FORMAT USED ON METRIC PORTED VALVES.
- 2) PRODUCT SHOWN WITH STANDARD 24' WIRE LEADS. ADDITIONAL WIRE LEAD LENGTHS AVAILABLE BY SPECIFYING THE APPROPRIATE SUFFIX DETAIL.
- 3) PRODUCT SHOWN WITH SILHOUETTE OF GROUND CONNECTION. GROUND CONNECTION ONLY ADDED BY SPECIFYING APPROPRIATE SUFFIX DETAIL -XN.
- 4) CONDUIT NUT MUST BE LOOSENED TO REORIENT CONDUIT CONNECTION AND MUST BE RETIGHTENED TO A TORQUE OF 55 IN.-LBS.

B	E.Y. 02-27-06	UPDATED DRAWING	13377
	N.G. 02-27-06		
LTR	REV'D/CK'D BY	DESCRIPTION	EWR NO/APP'D BY
REVISION LEVEL			

DRAWN BY RGM 4-17-97	CHECKED BY WJ 2-27-98	ENG APP'D MJR 3-3-98	ORIG EWR 9976	TITLE VALVE ASSEMBLY
MATL SCALE FULL	NEXT ASSY SCALE FULL	DWG SIZE B	UNLESS OTHERWISE SPECIFIED 2 PLACE DECIMAL $\pm .010$ ANGULAR DIMENSIONS $\pm 1/2^\circ$ 3 PLACE DECIMAL $\pm .003$ BREAK CORNERS & EDGES .010 DIA'S ON SAME CENTERLINE CONCENTRIC WITHIN .006 T.I.R MACHINED SURFACES, FINISHED TO 64 R.M.S. MAX. DO NOT SCALE DRAWING	
HARDNESS	HEAT TREAT	FINAL FINISH	THIS DRAWING IS CAD GENERATED AND THE PROPERTY OF VERSA PRODUCTS CO. INC. USE AND/OR REPRODUCTION OF ANY PORTION MUST BE WITH THE APPROVAL OF VERSA	

VERSA PRODUCTS CO. INC.  
PARAMUS N.J., U.S.A.  
VERSA BV, NETHERLANDS

DWG. NO.

GE5-0005

IN  
MM