



General Industrial
 Air Preparation Products

Liquid
 Separators

Particulate
 Filters

Coalescing
 Filters

Regulators

Pilot
 Regulators

Filter /
 Regulators

Micro-Mist
 Lubricators

Mist
 Lubricators

Combinations

- Port blocks (PB) available to provide 1-1/2" port extension to 1" ported bodies
- Proportional oil delivery over a wide range of air flows
- Bowl can be filled while air line is under pressure
- Transparent sight dome for 360° visibility
- 3/4", 1" & 1-1/2" ports (NPT, BSPP & BSPT)



Material specifications

Body	Aluminum
Bowls	Aluminum
Drains – twist (optional)	Plastic
Injector meter block & base assembly	Plastic
Seals	Nitrile
Sight dome	Polycarbonate
Sight gauge	Polyamide (Nylon)

Operating information

Pressure ratings:	0 to 250 PSIG (0 to 17.2 bar)
Temperature rating:	32°F to 175°F (0°C to 80°C)
Flow capacity:	3/4" — 240 SCFM 1" — 250 SCFM 1-1/2" — 260 SCFM
Minimum Flow for Lubrication:	6.6 SCFM at 100 PSIG
Suggested lubricant:	F442 oil
Petroleum based oil of 100 to 200 SSU viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C) (DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)	
For technical information see CD	


P3NL Hi-Flow Lubricators



Port size	Bowl type	Drain type	Flow SCFM	Part number (NPT)
3/4"	Metal / Sight gauge	None	240	P3NLA96LSN
1"	Metal / Sight gauge	None	250	P3NLA98LSN
1-1/2" #	Metal / Sight gauge	None	260	P3NLA9PLSN
# 1" port body with 1-1/2" port block				

Service kits

			P3NL
Adjustment knob			P04121
Bowl kits:	Metal bowl –	No drain	P3NKA00BSN
		Twist drain	P3NKA00BSM
Bowl latch kit			C11A33
Drain kit		Twist drain	PS512P
Fill cap kit			P3NKA00PL
Mounting bracket kit			P3NKA00MW
Oil –	1 Quart		F442001
	12 Quart case		F442003
	4 Gallon case		F442005
Pressure fill adapter kit			P3NKA00PK
Service kit			P3NKA00RL
Sight dome kits –	Polycarbonate		PS740P
	Nylon		PS740N
Sight gauge kit			P3NKA00PE

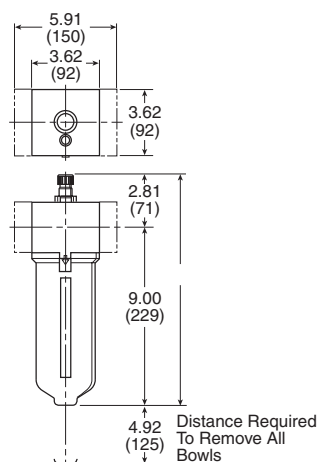

Most popular.

