




## Incremental encoder with solid shaft

RB-0200-I05/L2

Article no longer available - archive entry

Alternative articles: RB3500

When selecting an alternative article and accessories please note that technical data may differ!

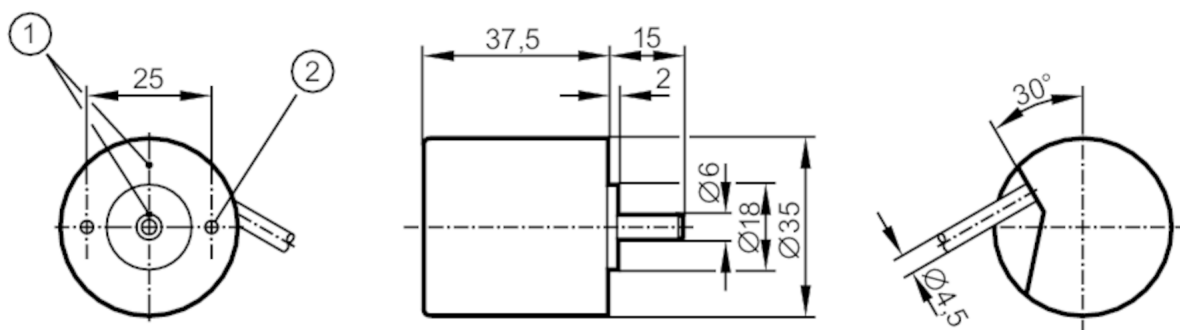

- 1 reference mark  
2 M3 Depth 5 mm



### Product characteristics

|                     |                |
|---------------------|----------------|
| Resolution          | 200 resolution |
| Shaft design        | solid shaft    |
| Shaft diameter [mm] | 6              |

### Application

|                    |             |
|--------------------|-------------|
| Function principle | incremental |
|--------------------|-------------|

### Electrical data

|                                 |      |
|---------------------------------|------|
| Operating voltage tolerance [%] | 10   |
| Operating voltage [V]           | 5 DC |
| Current consumption [mA]        | 120  |

### Outputs

|                                   |     |
|-----------------------------------|-----|
| Electrical design                 | TTL |
| Max. current load per output [mA] | 20  |
| Switching frequency [kHz]         | 300 |
| Phase difference A and B [°]      | 90  |

### Measuring/setting range

|            |                |
|------------|----------------|
| Resolution | 200 resolution |
|------------|----------------|

### Operating conditions

|                                |                     |
|--------------------------------|---------------------|
| Ambient temperature [°C]       | -30...100           |
| Max. relative air humidity [%] | 75; (briefly: 95 %) |
| Protection                     | IP 64               |

### Tests / approvals

|                      |                     |
|----------------------|---------------------|
| Shock resistance     | 100 g (6 ms)        |
| Vibration resistance | 10 g (55...2000 Hz) |



## Incremental encoder with solid shaft

RB-0200-I05/L2

| Mechanical data                           |         |                 |
|-------------------------------------------|---------|-----------------|
| Weight                                    | [g]     | 263.9           |
| Dimensions                                | [mm]    | Ø 35 / L = 52.5 |
| Materials                                 |         | aluminium       |
| Max. revolution, mechanical               | [U/min] | 10000           |
| Max. starting torque                      | [Nm]    | 1               |
| Reference temperature                     | [°C]    | 20              |
| Shaft design                              |         | solid shaft     |
| Shaft diameter                            | [mm]    | 6               |
| Shaft material                            |         | steel (1.4104)  |
| Max. shaft load axial (at the shaft end)  | [N]     | 5               |
| Max. shaft load radial (at the shaft end) | [N]     | 10              |


## Electrical connection

Cable: 2 m, PUR; radial, can also be used axially

|             |                  |
|-------------|------------------|
| brown       | A                |
| green       | A inverted       |
| grey        | B                |
| pink        | B inverted       |
| red         | 0 index          |
| black       | 0 index inverted |
| brown/green | L+ (Up)          |
| white/green | L- 0 V (Un)      |
| blue        | L+ sensor        |
| white       | L- 0 V sensor    |
| lilac       | failure inverted |
| screen      | housing          |

## Diagrams and graphs

Pulse diagram



direction of rotation clockwise (looking at the shaft)